


Insulated Lightning Conductor Cable Holder Base

The **Cable Holder Base** is used to fix **Cable Holders** with an M8 threaded insert to a flat surface. It is supplied with 2 x 6mm diameter holes for self-tapping screws or bolts.

DESCRIPTION	WEIGHT (kg)	PART NO.
Cable Holder Base with M8 threaded stud	0.10	KM30600101

Material: Galvanised Steel



APPLICATION

COMPONENT ASSEMBLY:


The Kingsmill **Insulated Lightning Conductor Cable Holder Base** is designed for use with Cable Holders having an M8 stud

Concrete Holdfast Block

The **Concrete Holdfast Block** is used for securing Cable Holders in place on flat surfaces where direct fixing isn't possible.

DESCRIPTION	WEIGHT (kg)	PART NO.
Concrete Holdfast Block complete with M8 threaded insert	5.00	KM92910101

Material: Concrete

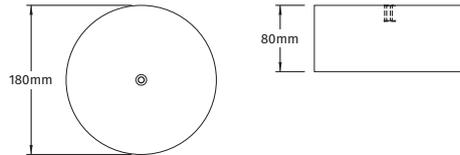

APPLICATION

COMPONENT ASSEMBLY:

The Kingsmill **Concrete Holdfast Block** is designed for use with bracketry having an M8 threaded rod.