

Double-Threaded Screw

Double-Threaded Screws can be used with holders having an M8 insert. For example, KM30400101 (page AT:46).


SCREW LENGTH (A) (mm)	WEIGHT (kg)	PART NO.
80	0.18	KM31208001
120	0.29	KM31212001
200	0.53	KM31220001

Material: Galvanised Steel

APPLICATION

COMPONENT ASSEMBLY: Double-Threaded Screw + Insulated Lightning Conductor Cable Holder =

The **Double-Threaded Screw** is designed for use where a large stand-off space is required.

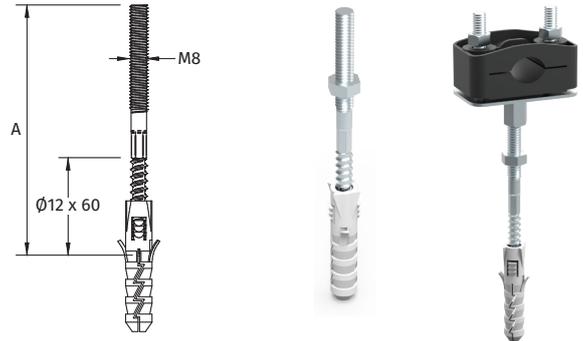

Threaded Rod

Threaded Rods can be used with holders having an M8 insert for example, KM30400101 (page AT:46). Supplied in 1m lengths for cutting to size at site.

Zinc Plated Threaded Rod

THREAD	WEIGHT (kg)	PART NO.
M8	0.40	KM30800101
M10	0.50	KM30800201
M12	0.60	KM30800301
M16	1.20	KM30800401

Stainless Steel Nuts

THREAD	WEIGHT (kg)	PART NO.
M8	0.004	A2FN08
M10	0.001	A2FN10
M12	0.016	A2FN12
M16	0.020	A2FN16



APPLICATION

COMPONENT ASSEMBLY: Threaded Rod + Insulated Lightning Conductor Cable Holder =

The **Threaded Rod** is designed for use where a large stand-off space is required.